


1³/₄" Fan Tray Assemblies

150-900 CFM (255-1529 M³/HR)

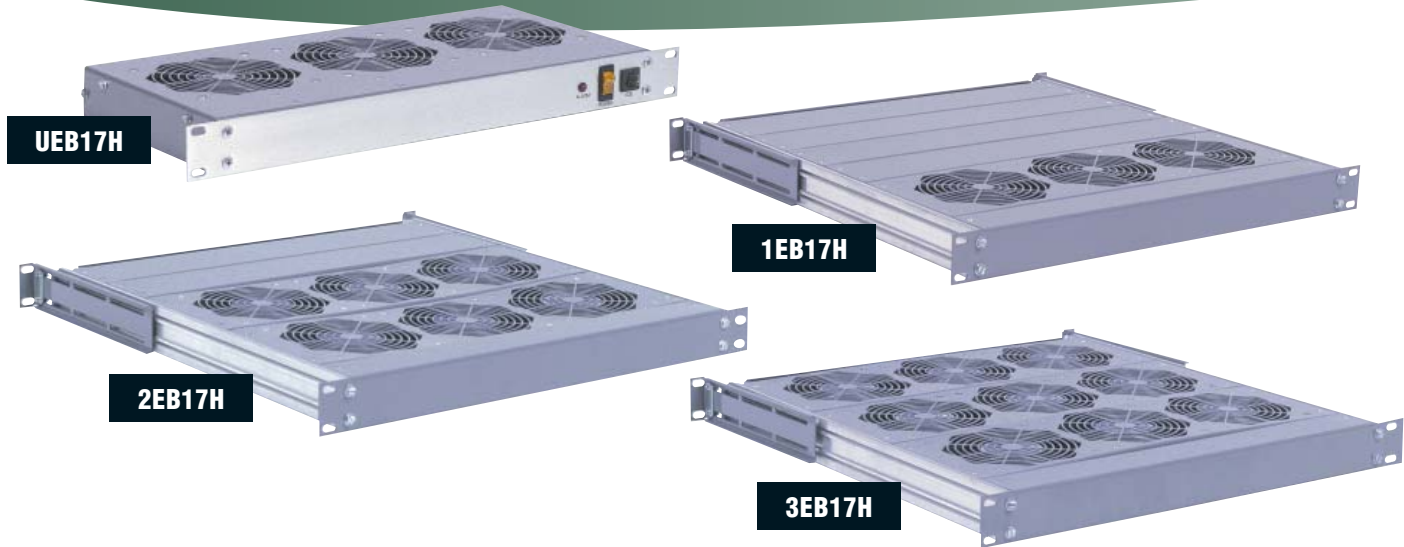

Description

McLean Thermal Fan Trays are a versatile solution to cooling card cages and racks. Redundant cooling with optional failure detection makes this air mover the obvious choice for sensitive equipment. Minimal rack space and repositionable fans are suited to today's smaller enclosures.


Standard Model Features

- 115/230 VAC
- 12, 24 or 48 VDC
- 50/60 Hz
- Slim 1³/₄" Panel Height
- 19" rack mountable
- Field adjustable fan strips to optimize air flow
- Easy access to fan tray from front and back
- Simplified installation without the need for side access
- Support bracket
- Exhaust Guard
- 6" Power Cord AC trays, Terminal block on DC trays
- Permanently lubricated ball bearing motors
- 100% functionally tested
- UL recognized, CSA Certified Motors, CE


Options

- Variable Speed up to 6 fans in 115/230 VAC
- Failure Alarm LED
- Failure Alarm Output Signal
- Circuit Breaker


Outline Dimensions In Inches

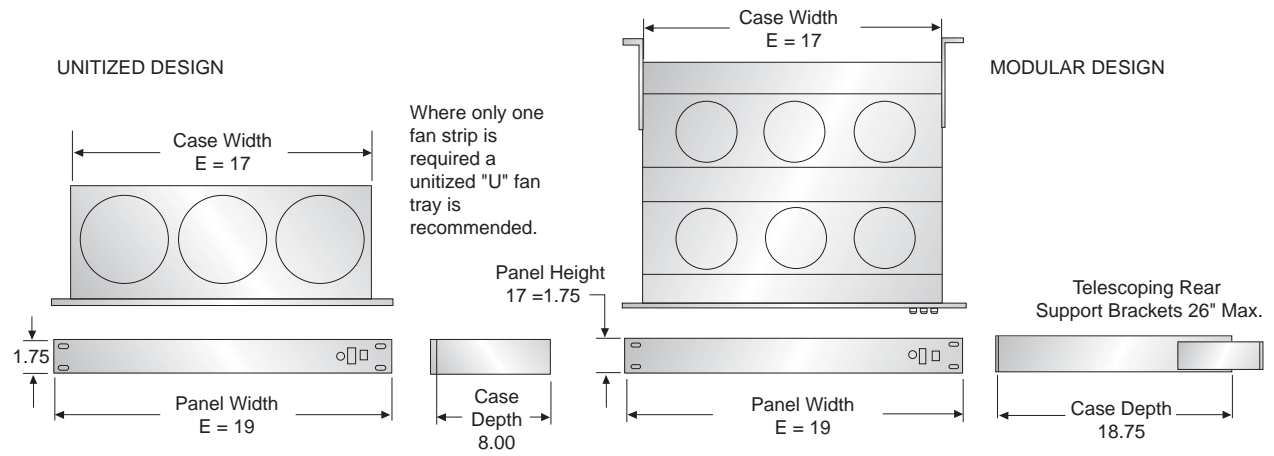

Performance Data

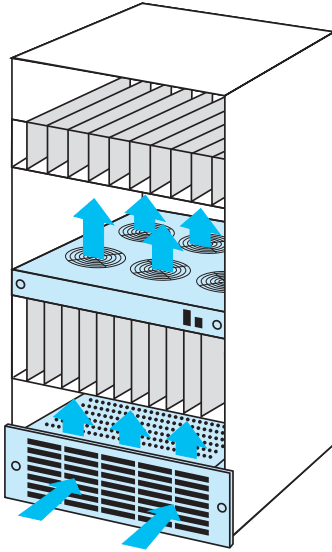

MODEL PART NUMBER IDENTIFICATION

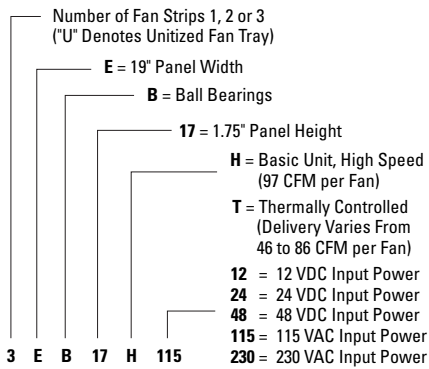

Model	Volts	Hz	CFM	M ³ /HR	RPM	Max Oper Temp °F/°C	AMPS Run	Watts	# of Fans	Shipping Weight (Lbs/Kg)
UEB17H115	115	50/60	315	536	3100	158/70	0.4	42	3	7.8/3.4
UEB17H230	230	50/60	315	536	3100	158/70	0.2	42	3	7.8/3.4
UEB17T115	115	50/60	330	561	3000	158/70	-	-	3	8.1/3.5
UEB17T230	230	50/60	330	561	3000	158/70	-	-	3	8.1/3.5
UEB17H12	12	DC	330	561	3000	158/70	1.7	21	3	7.6/3.3
UEB17H24	24	DC	330	561	3000	158/70	0.8	21	3	7.6/3.3
UEB17H48	48	DC	330	561	3000	158/70	0.4	21	3	7.6/3.3
UEB17T12	12	DC	330	561	3000	158/70	1.7	21	3	7.6/3.3
UEB17T24	24	DC	330	561	3000	158/70	0.8	21	3	7.6/3.3
UEB17T48	48	DC	330	561	3000	158/70	0.4	21	3	7.6/3.3
1EB17H115	115	50/60	315	536	3100	158/70	0.4	42	3	8.1/3.5
1EB17H230	230	50/60	315	536	3100	158/70	0.2	42	3	8.1/3.5
1EB17T115	115	50/60	330	561	3000	158/70	-	-	3	8.4/3.7
1EB17T230	230	50/60	330	561	3000	158/70	-	-	3	8.4/3.7
1EB17H12	12	DC	330	561	3000	158/70	1.7	21	3	8/3.5
1EB17H24	24	DC	330	561	3000	158/70	0.8	21	3	8/3.5
1EB17H48	48	DC	330	561	3000	158/70	0.4	21	3	8/3.5
1EB17T12	12	DC	330	561	3000	158/70	1.7	21	3	8/3.5
1EB17T24	24	DC	330	561	3000	158/70	0.8	21	3	8/3.5
1EB17T48	48	DC	330	561	3000	158/70	0.4	21	3	8/3.5
2EB17H115	115	50/60	630	1071	3100	158/70	0.9	84	6	10.2/4.5
2EB17H230	230	50/60	630	1071	3100	158/70	0.5	84	6	10.2/4.5
2EB17T115	115	50/60	660	1122	3000	158/70	-	-	6	10.8/4.7
2EB17T230	230	50/60	660	1122	3000	158/70	-	-	6	10.8/4.7
2EB17H12	12	DC	660	1122	3000	158/70	3.4	42	6	10/4.4
2EB17H24	24	DC	660	1122	3000	158/70	1.7	42	6	10/4.4
2EB17H48	48	DC	660	1122	3000	158/70	0.9	42	6	10/4.4
2EB17T12	12	DC	660	1122	3000	158/70	3.4	42	6	10/4.4
2EB17T24	24	DC	660	1122	3000	158/70	1.7	42	6	10/4.4
2EB17T48	48	DC	660	1122	3000	158/70	0.9	42	6	10/4.4
3EB17H115	115	50/60	945	1607	3100	158/70	1.4	126	9	12.5/5.5
3EB17H230	230	50/60	945	1607	3100	158/70	0.8	126	9	12.5/5.5
3EB17T115	115	50/60	990	1684	3000	158/70	-	-	9	13.2/5.8
3EB17T230	230	50/60	990	1684	3000	158/70	-	-	9	13.2/5.8
3EB17H12	12	DC	990	1684	3000	158/70	5.2	63	9	12.2/5.4
3EB17H24	24	DC	990	1684	3000	158/70	2.6	63	9	12.2/5.4
3EB17H48	48	DC	990	1684	3000	158/70	1.3	63	9	12.2/5.4
3EB17T12	12	DC	990	1684	3000	158/70	5.2	63	9	12.2/5.4
3EB17T24	24	DC	990	1684	3000	158/70	2.6	63	9	12.2/5.4
3EB17T48	48	DC	990	1684	3000	158/70	1.3	63	9	12.2/5.4

Performance Curves

