

Multi-Exhaust Packaged Blowers

225-600 CFM (382-1019 M³/HR)



4EB300



4EB3500



4EB412


Description

McLean Thermal Multi-Exhaust Packaged Blowers feature top and rear exhausts, for a wide, deep airflow pattern. Designed with two separate blowers inside, multi-exhaust blowers also offer redundancy and increased airflow.

Standard Model Features

- 115/230 VAC
- 50/60 Hz
- Permanent, Washable Aluminum Filter
- 19" Rack Mountable
- Aluminum Grille
- Exhaust Guard
- Power Cord
- Permanently lubricated ball bearing motors
- 100% functionally tested
- UL recognized, CSA Certified Motors, CE


Outline Dimensions In Inches

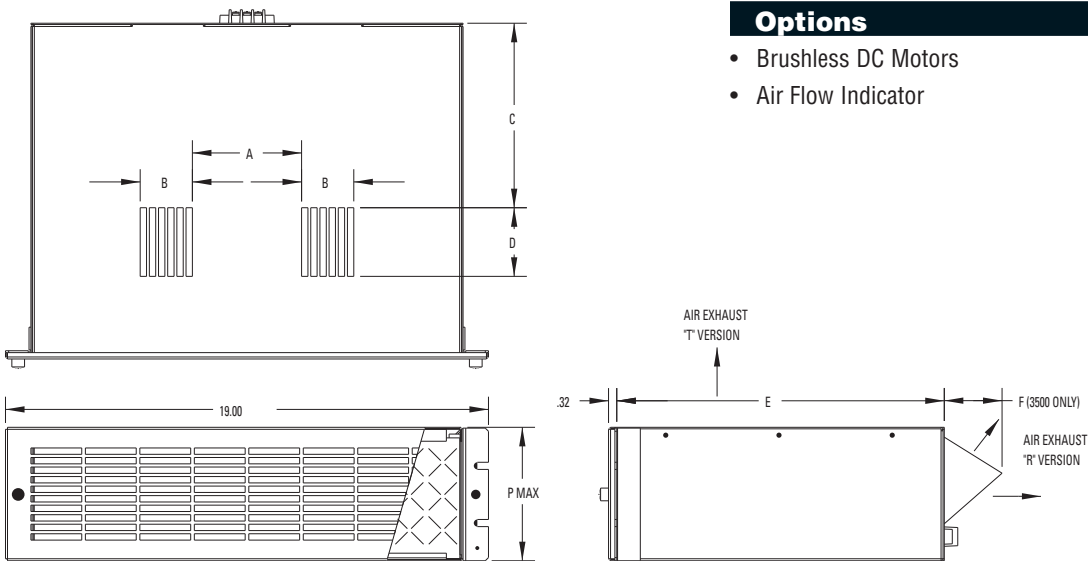

Dimensions

Model	PMax	A	B	C	D	E	F
4EB300RT-XXX	5.25	4.30	2.05	7.26	2.70	12.88	-
4EB3500RT-XXX	5.25	4.38	4.56	10.24	2.12	14.66	1.75
4EB412RT-XXX	7.00	4.23	3.15	11.98	2.50	16.40	-

Performance Data

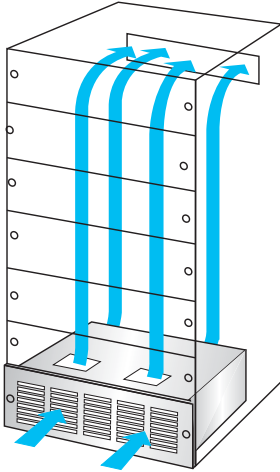

Model	Volts	Hz	CFM	M ³ /HR	RPM	Max Oper Temp °F/°C	AMPS Run	Watts	Shipping Weight (Lbs/Kg)
4EB300RT-115	115	50/60	225	382	2900	104/40	1.8	130	21/9.5
4EB300RT-230	230	50/60	225	382	2900	104/40	1.0	130	21/9.5
4EB3500RT-115	115	50/60	400	680	3000	104/40	3.1	240	22/10
4EB3500RT-230	230	50/60	400	680	3000	104/40	1.7	240	22/10
4EB412RT-115 STOCK	115	50/60	600	1019	3200	104/40	2.9	325	22/10
4EB412RT-230	230	50/60	600	1019	3200	104/40	1.4	325	22/10

* Non-Stock units may have additional numbers / letters designating all desired options. Consult the factory for specific model numbers.

Performance Curves

